


LUBRICATED WITH MOBILITH SHC 460 GREASE
 RAD CLEARANCE: 0.145/0.190 (C4)
 MAXIMUM VELOCITY: 240 RPM
 PRECISION CLASS: P0

MATERIAL: 18NiCrMo5
 THERMAL TREATMENT: CASE HARDENING
 (DEPTH 2.5mm) 60-4 HRC

N°3 HOLES Ø8 TO 120°

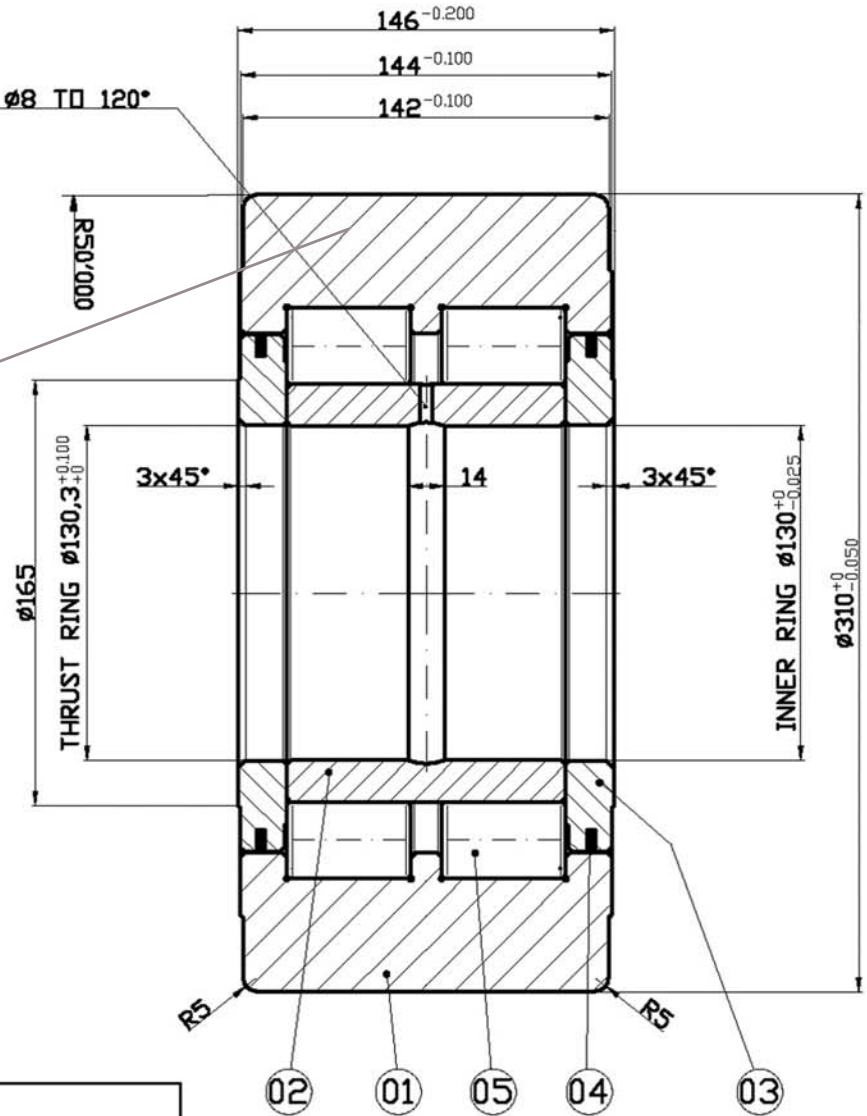

LOAD AS BEARING
 C = 1194 KN
 C0 = 2192 KN
 LOAD AS WHEEL
 C = 1020 KN
 C0 = 1600 KN

NNTR130X310X146MM

-MECHANICAL DETAILS-

N°	DESCRIPTION	MATERIAL	STANDARD
01	OUTER RING	18NiCrMo5	CASE HARDENED HRC 60-4
02	INNER RING	100Cr6	
03	THRUST RING	16CrNi4	
04	FEY AS 202		
05	ROLLER Ø30x48	100Cr6	

Designed by _____ Checked by _____ Approved by _____ Date _____ Date _____



Track Roller T94222

Edition _____ Sheet 1/1