


“U” PROFILE PRECISION GUIDE RAILS

“U” precision guide rails are made from “U” standard guide rails.

They are processed by a machine tool in order to have a high level of processing with extremely limited tolerances.

Used with “DR” special precision combination bearings inside, they represent a very good alternative to the linear guide system.

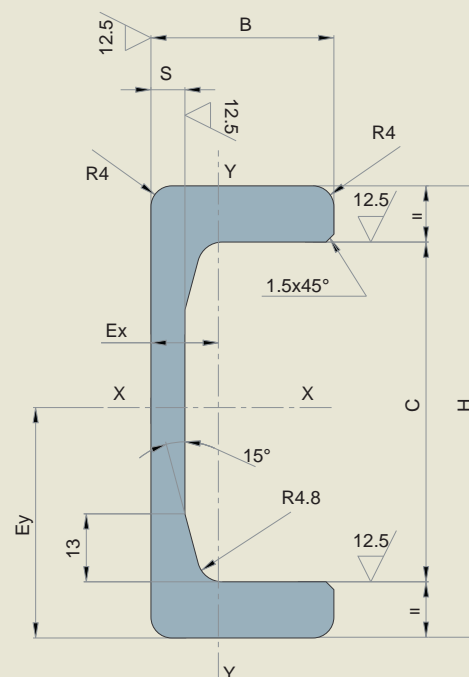

SPECIAL ORDER ITEM

Part Number	Dimensions				Moments of Inertia		Modulus of Resistance		WEIGHT Kg/m	Ex mm	Ey mm
	C	H	B	S	Jx Cm ⁴	Jy Cm ⁴	Wx Cm ³	Wy Cm ³			
EC 065 L	65	86,5	35	6,5	125,1	12,9	28,9	10,7	9,44	12,09	43,25
EC 074 L	74	103	39	7	248,9	23,2	48,3	16,3	13,14	14,22	51,5
EC 082 L	82	121	39,2	9	439,1	30,3	73,4	21,4	17,87	14,44	60,5
EC 093 L	93	135,5	51	11	792	75	116,9	39,6	25,16	18,94	67,75
EC 112 L	112	157	59	12	1357,5	126,8	172,9	59,1	31,47	21,46	78,5
EC 128 L	128	175	64	14	1891,5	174,2	227,6	77,4	37,71	22	87
EC 154 L	154	201	69	17	3098,7	230,8	308,3	46	45,98	22,8	100,51

Material: 1.1197/V1027M

The profiles are sold “cut-to-length”. Maximum length is 4M.